


MODEL: PL2X4UCCTW2

## 2x4 LED PANEL LIGHT

## PRODUCT DESCRIPTION

LED Panel light provides high lumen efficacy and energy savings to projects in low ceiling applications. This panel light is an excellent energy efficient replacement for fluorescent fixture.

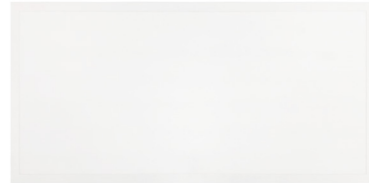

## HIGHLIGHTS

- DLC Listed
- AC120-347V Wide Input
- Color Temperature Selectable: 3500K/4000K/5000K
- Wattage Selectable: 30W/40W/50W
- Efficacy: 111.37lm/W
- CRI>80
- 1-10V Dimmable
- Damp Location Rated
- L70-50,000 hours
- Ultra-thin, Seamless Aluminum Frame
- PMMA Non-Yellowing Frosted Lens
- 7 Years Warranty. Extended Warranty Available



## APPLICATIONS

Designed for use in offices, schools, health care spaces, retail stores and more.

## ORDERING INFORMATION

ORDER SKU	DLC MODEL #	INPUT VOLTAGE	POWER (W)	EFFICACY (LMW)	DELIVERED LUMENS	CCT(K)	FINISH	SIZE
500816UCCTW	PL2X4UCCTW	AC120-347V	30/40/50W	111.37LMW	5235LM	3500/4000/5000K	WHITE	2x4
500816UCCTW2	PL2X4UCCTW2	AC120-347V	30/40/50W	111.37LMW	5235LM	3500/4000/5000K	WHITE	2x4
500812UCCTW	PL2X2UCCTW	AC120-347V	30/35/40W	111.37LMW	4400LM	3500/4000/5000K	WHITE	2X2
500814UCCTW	PL1X4UCCTW	AC120-347V	30/35/40W	111.37LMW	4400LM	3500/4000/5000K	WHITE	1x4
500813-BL	PL2X230WUNV50K	AC120-277V	30W	134LMW	4025LM	5000K	WHITE	2X2
500813D	KK-PS-22EW-40-LARZ	AC120-277V	40W	115LMW	4600LM	5000K	WHITE	2X2
500815	KK-PS-14EW-40-LFSZ	AC120-277V	40W	111LMW	4451LM	5000K	WHITE	1x4
500829-35K	KK-PS-22WW-40-LLCZ	AC120-277V	40W	113LM	4276LM	3500K	WHITE	2X2
500830-35K	KK-PS-24NW-50-LFSZ	AC120-277V	50W	112LM	5883LM	3500K	WHITE	2x4
500831-35K-BL	PL1x430WUNV35K	AC120-277V	30W	128LM	3850LM	3500K	WHITE	1x4

REV 1

## 2x4 LED PANEL LIGHT

### PRODUCT FEATURE

- Lightweight and Slim Design
- AC120-347V Wide Input
- Color Temperature Selectable: 3500K/4000K/5000K
- Wattage Selectable: 30W/40W/50W
- Efficacy: 111.37lm/W
- CRI>80
- 1-10V Dimmable, Flicker-Free Driver
- PMMA Non-Yellowing Frosted Lens
- Unique Heat Dissipation Design
- Seismic Clips Included
- High Shock and Vibration Resistance
- Embed/Suspension/Ceiling-mount
- L70-50,000 hours



• 7 Years Warranty. Extended Warranty Available.

### PRODUCT SPECIFICATIONS


LED TYPE	WATTS	SYSTEM EFFICACY	LUMENS	COLOR TEMP	BEAM ANGLE	CRI	VOLTAGE	POWER FREQ	POWER EFFICIENCY	POWER FACTOR	THD	OPERATING TEMP
SEOUL	30W 40W 50W	111.37 LM/W	5235LM @50W	3500K 4000K 5000K	120°	83.8	120-347V	50/60HZ	86%-87%	>.95	<13.4%	-20 to 40C

### DIMENSIONS

Length: 47.6" 120.9CM  
Width: 23.7" 60.2CM  
Depth: 1.2" 3.0CM

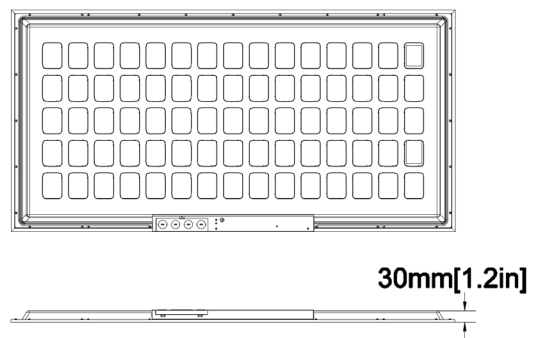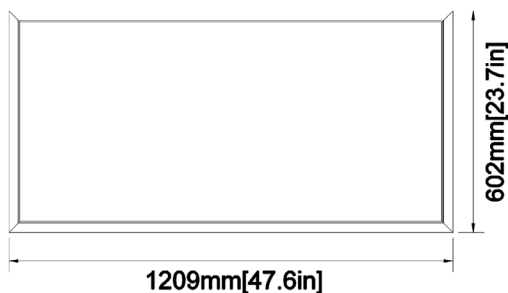

### MOUNTING OPTIONS



SUSPENSION KIT

SKU HangingKits



SURFACE MOUNT KIT

SKU 900018-2X4

### OPTIONAL ACCESSORIES



347V QUICK CONNECTOR

SKU STN 68869



OCCUPANCY SENSOR

SKU WSPPEMUNV-D


REV 1

## 2x4 LED PANEL LIGHT


### PHOTOMETRIC INFORMATION

Fixture Output: Rated Lumens/Lamp: 5235.3  
 Zonal lumens in the 0-60° zone (%) 78.0  
 Input Wattage: 50  
 Beam Angle (°) 113.9  
 Center Beam Candle Power (cd): 1792


### ISOFOOTCANDLE PLOT

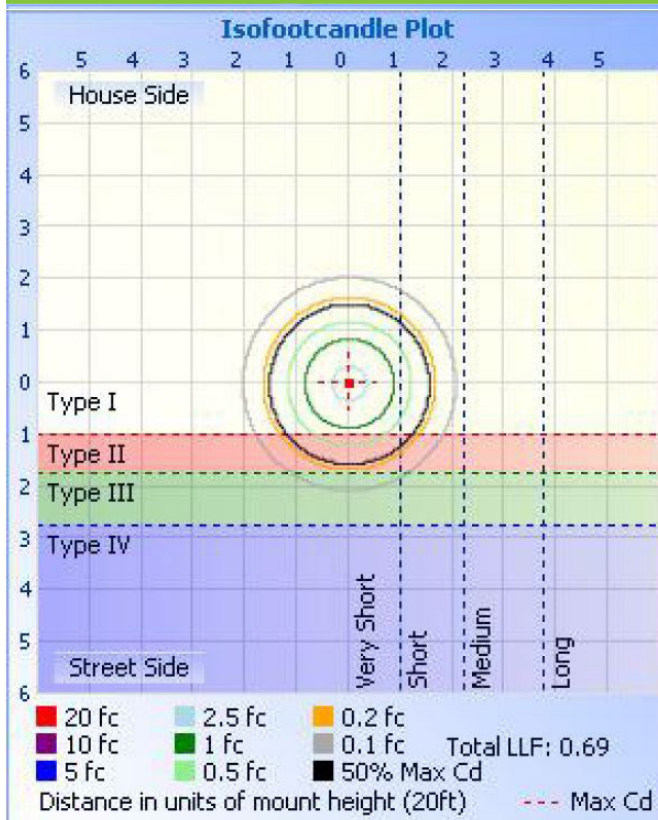


### ILLUMINANCE AT A DISTANCE

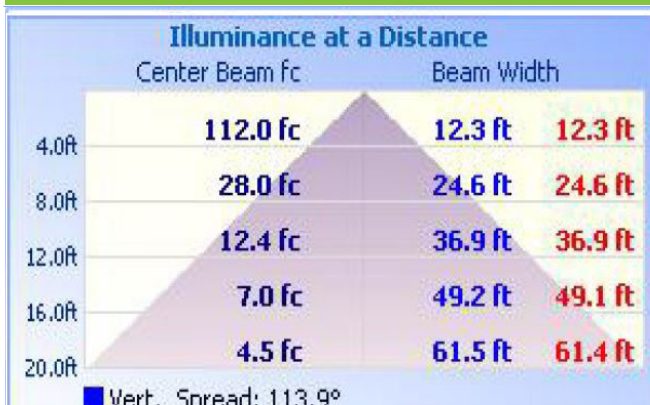

### POLAR CANDELA DISTRIBUTION

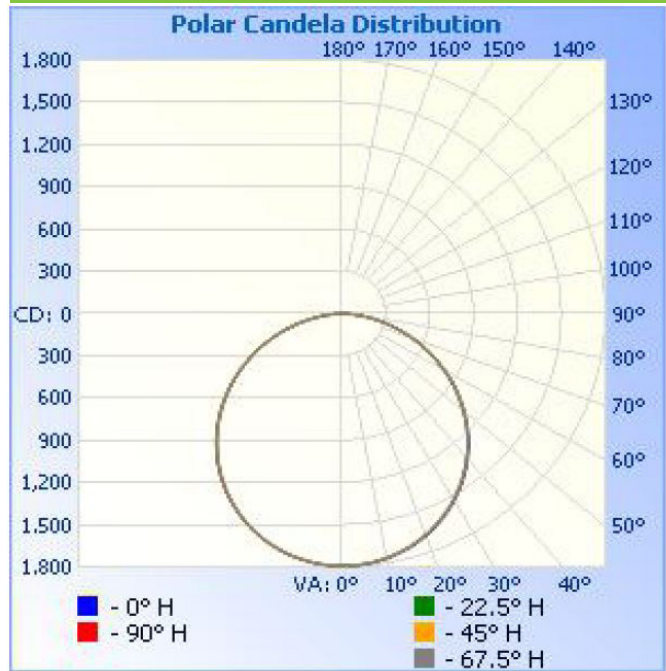

### ISOCANDELA PLOT

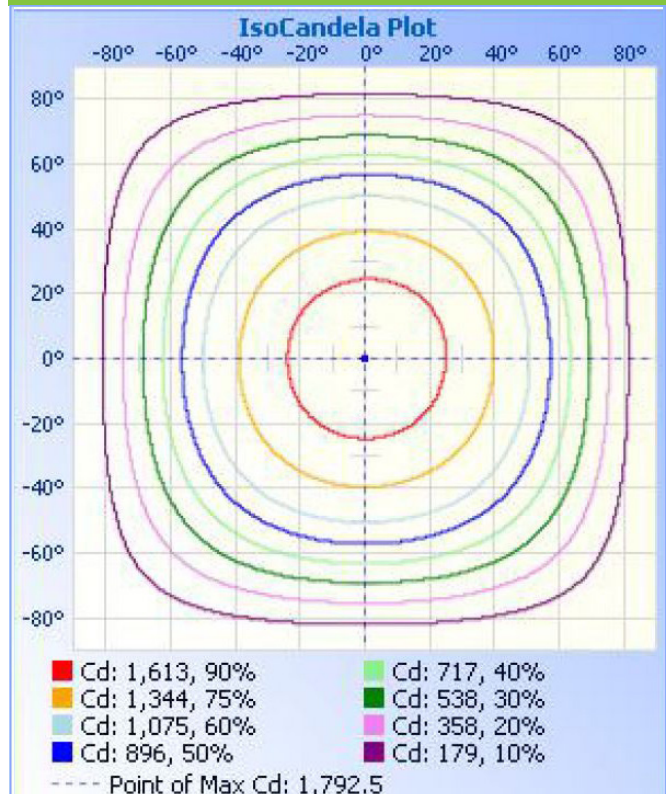

REV 1