


4" LED SLIM PANEL LIGHT (3CCT)

Job Information			
Project Name			
Location			
Quantity		Date	
Contact		Phone	

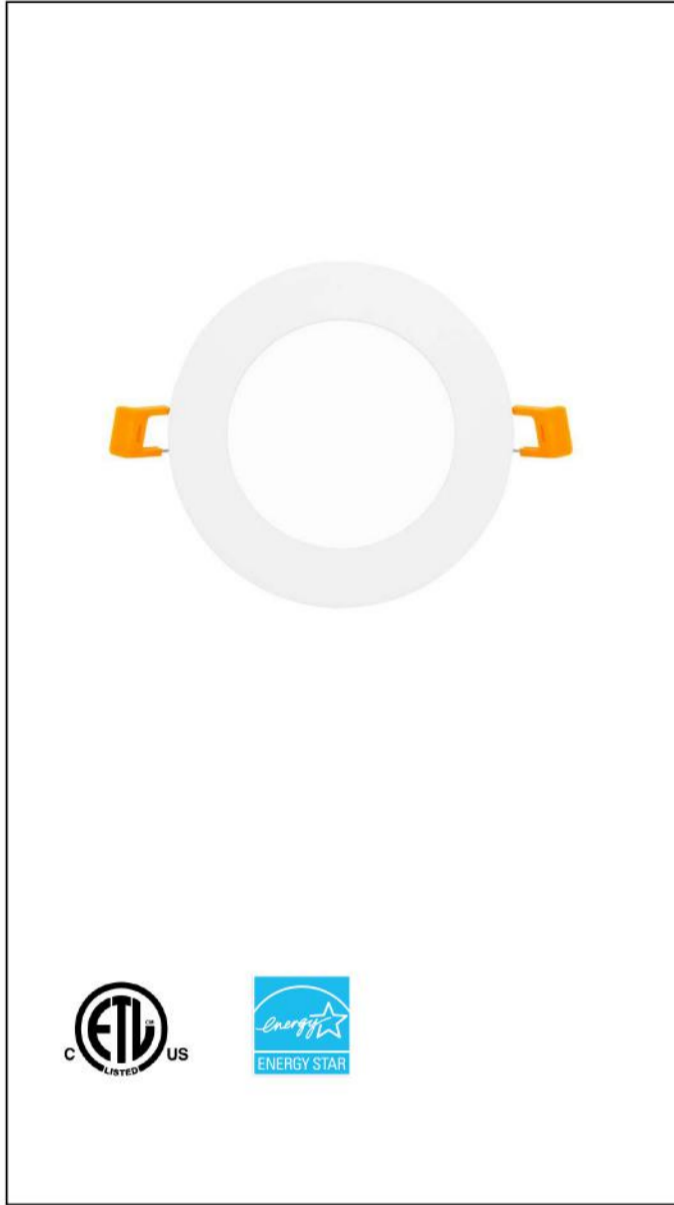

Specifications	
Cut-Out Size	4 inch
Wattage	9 watts
Input Volatge	AC120V,60Hz
Beam Angle	110°
Light Sourece	SMD LED
Color Temperature	3000K-4000K-5000K
CRI	80Ra
Lumens Output	700±5%
Lumen Efficiency	80lm/w
Halogen Equiv.	65 watts
Dimmable	100%-10% (110V only)
Dimming Tech.	Triac dimming
Cerification	cETLus,Energy Star
Power Factor	>0.9
Projected Life	50,000hrs at 70% Light Output
Warranty	5 years
Approved Location	Damp Locations
IC Rated	Yes
Air Tight	Yes

Housing
Durable die-casting aluminum lamp housing with excellent heat dissipation,provide maximum airflow for the SMD LED light source.



LED Characteristics
This fixture contains SMD2835 LED module that offer high light color uniformity, 9 watts up to 700 lumens;

Dimming
This panel light is dimmable from 100% down to 10% smoothly, works with the majority of standard triac dimmers like Lutron/leviton,etc. Please contact us for compatible dimmer list.


Mounting
Includes two spring loaded clips to attached to any ceiling material. Easy recessed installation without needing a stand pot light can.

Special Features
CCT Adjustable function - 3 light colors in one light fixture.

Select a color temperature from warm white, nature white, and daylight by using the DIP switch on the driver box.

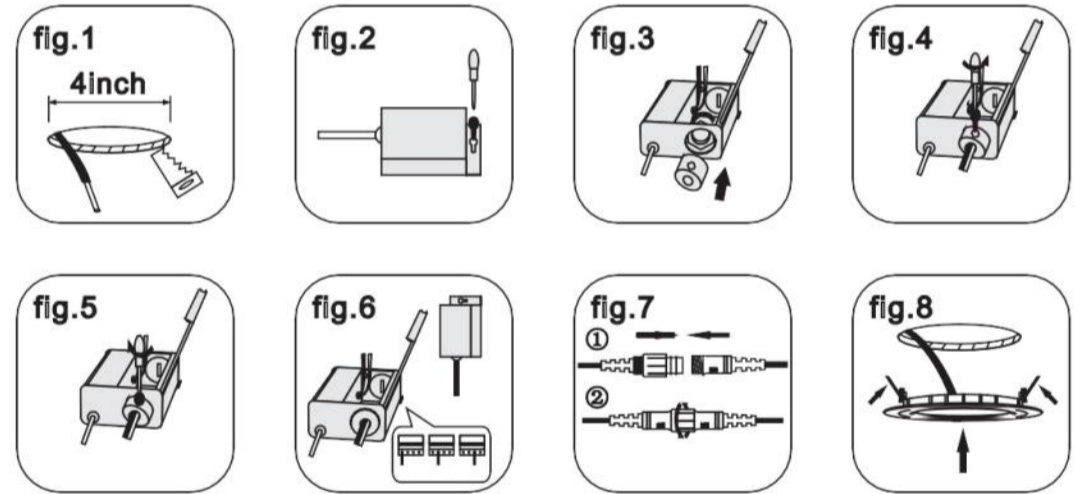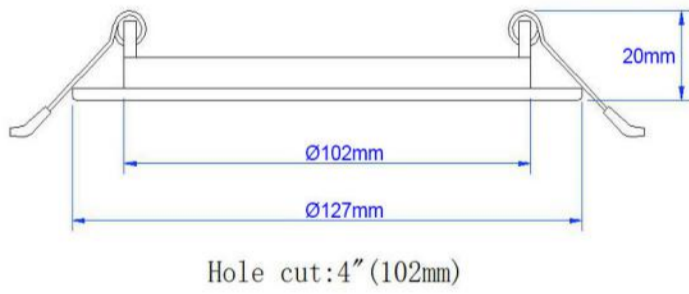

Luminous Intensity Distribution Curve

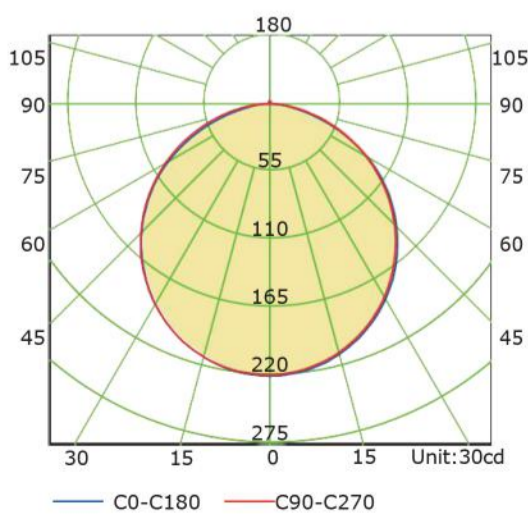

Illuminance at a Distance

