


### Features

- IC Rated
- Airtight
- Dimmable
- Work with most of existing dimmer in market
- Five years limited warranty
- Not for emergency lighting
- Suitable for damp locations







360° Rotation

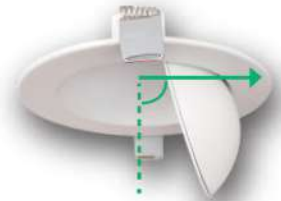


90° Tilt

	3WAY CCT Adjustable			5WAY CCT Adjustable		
	Ø4.7"x1.1"	Ø4.7"x1.1"	Ø4.7"x1.1"	Ø4.7"x1.1"	Ø4.7"x1.1"	Ø4.7"x1.1"
<b>Dimension</b>	Ø4.7"x1.1"	Ø4.7"x1.1"	Ø4.7"x1.1"	Ø4.7"x1.1"	Ø4.7"x1.1"	Ø4.7"x1.1"
<b>Fixture Color</b>	White	Black	Brushed nickel	White	Black	Brushed nickel
<b>Watts</b>	8W	8W	8W	9W	9W	9W
<b>Volts</b>	120V	120V	120V	120V	120V	120V
<b>CRI</b>	80	80	80	80	80	80
<b>Color Temperature</b>	30K,40K,50K ADJ	30K,40K,50K ADJ	30K,40K,50K ADJ	27K,30K,35K,40K,50K ADJ	27K,30K,35K,40K,50K ADJ	27K,30K,35K,40K,50K ADJ
<b>Lumens</b>	700	700	700	750	750	750
<b>Beam Angle</b>	40°	40°	40°	40°	40°	40°
<b>Operating Temperature</b>	(-4°F) - (104°F)	(-4°F) - (104°F)	(-4°F) - (104°F)	(-4°F) - (104°F)	(-4°F) - (104°F)	(-4°F) - (104°F)
<b>Rated Life</b>	50000H	50000H	50000H	50000H	50000H	50000H
<b>Weight(g)</b>	440	440	440	440	440	440
<b>Warranty</b>	5 years	5 years	5 years	5 years	5 years	5 years

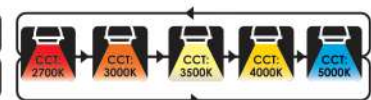

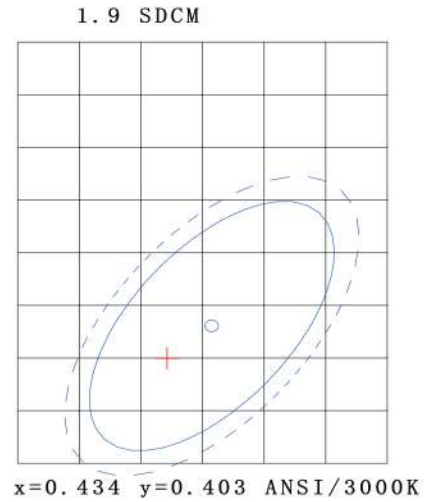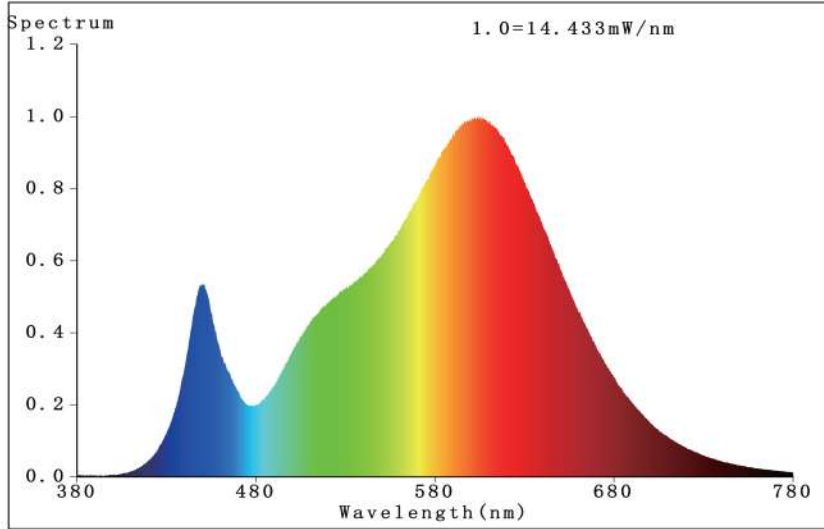

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

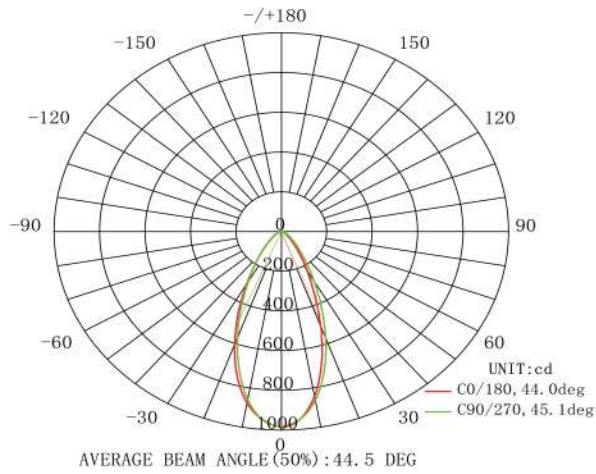

AAI Figure

