

## LED Commercial Strip

### PRODUCT DESCRIPTION

The Elakeview LED Commercial Strip is designed for surface and suspended mounting for indoor use. Its narrow strip design, sleek and modern profile work perfectly for task lighting applications where high efficiency, row mounting is required. Suitable for damp locations



### HIGHLIGHTS

- DLC Premium Listed
- Efficacy: 134lm/w
- CRI-82
- AC120-347V Wide Input
- 1-10V Dimmable
- Color Temperature Selectable: 3500K/4000K/5000K
- Wattage Selectable: 34W/38W/45W
- Optional Microwave Dimming Sensor
- Damp Location Rated
- L70 - 50,000 hours
- 5 Years Warranty. Extended Warranty Available.



### APPLICATIONS

Designed for manufacturing, industrial, shops, corridor, garage, gymnasium, retail and warehouse applications.

### ORDERING INFORMATION

INPUT VOLTAGE	POWER (W)	EFFICACY (LMW)	DELIVERED LUMENS	CCT(K)	FINISH	SI E
AC120-277V	20W	131LMW	2620LM	4000K	WHITE	2FT
AC120-347V	18/25/30W	130LMW	3900LM	3500/4000/5000K	WHITE	3FT
AC120-277V	18W	132LMW	2376LM	5000K	WHITE	4FT
AC120-277V	35W	131LMW	4409LM	3500K	WHITE	4FT
AC120-347V	34/38/45W	135LMW	6075LM	3500/4000/5000K	WHITE	4FT
AC120-347V	34/38/45W	134LMW	6030LM	3500/4000/5000K	WHITE	4FT
AC120-277V	38W	133LMW	5054LM	4000K	WHITE	8FT
AC120-347V	65/75/90W	135LMW	12150LM	3500/4000/5000K	WHITE	8FT
AC120-347V	65/75/90W	134LMW	12060LM	3500/4000/5000K	WHITE	8FT
AC347V	32W	132LMW	4224LM	4000K	WHITE	4FT
AC347V	32W	134LMW	4288LM	5000K	WHITE	4FT
AC347V	65W	132LMW	8580LM	4000K	WHITE	8FT
AC347V	65W	134LMW	8710LM	5000K	WHITE	8FT

## LED Commercial Strip

### PRODUCT FEATURE


- LED saves 50-60% of energy over T8-T5HO
- High LMW(Lumen per watt) LM80 Approved Seoul LED's
- CRI>80
- Color Temperature Selectable: 3500K/4000K/5000K
- Wattage Selectable: 34W/38W/45W
- 0-10V continuous dimming, optional microwave occupancy sensor (50%-30%-10%-0%)
- Wide input voltage 120-347V
- Die formed of 24 gauge cold-rolled steel body
- Damp location rated
- All Steel surface are painted after fabrication with high gloss baked white matte power painted
- Tool-Less Hinged bottom LED driver access doors
- Can be surface mounted, or chain suspended
- UL-cUL Listed, RoHS Compliant, Design Lights Consortium (DLC ) Qualified Products List

• 5 Years Warranty.150,000 hrs lifespan,Extended Warranty Available.


### PRODUCT SPECIFICATIONS

LED TYPE	WATTS	SYSTEM EFFICACY	LUMENS	COLOR TEMP	BEAM ANGLE	CRI	VOLTAGE	POWER FREQ	LUMINAIRES (LM/FT)	POWER FACTOR	THD
SEOUL	34W 38W 45W	134 LM/W	4556LM 5092LM 6030LM	3500K 4000K 5000K	120°	82	120-347V	50/60HZ	1201.02	0.9178	<20%

### DIMENSIONS

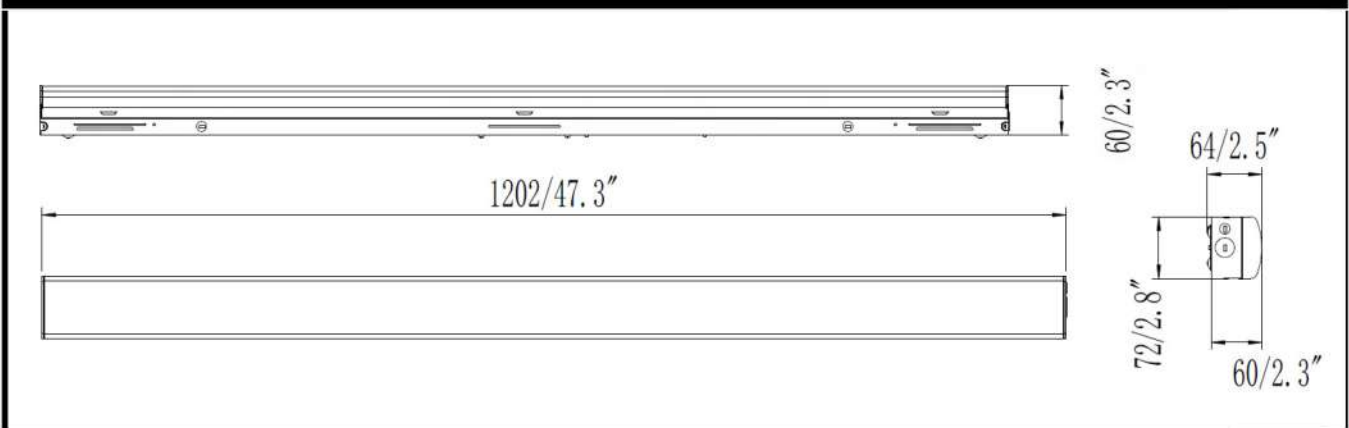

### INCLUDED

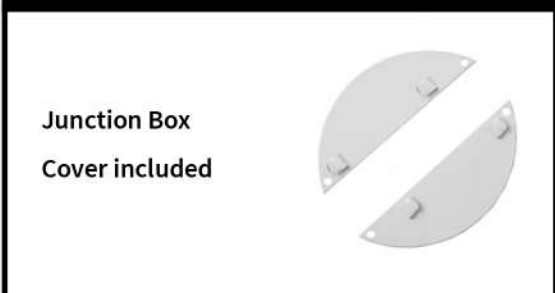

### OPTIONAL ACCESSORIES





## LED Commercial Strip


### PHOTOMETRIC INFORMATION

Lamp Output: Luminous Flux(lm): 6207.6  
 Beam Angle (50%): Horizontal: 118.5°, Vertical: 102.8°  
 Input Wattage: 46.34  
 CCT (K): 3504  
 Luminous Efficacy (lm/W): 133.96


### COLOR RENDITION REPORT

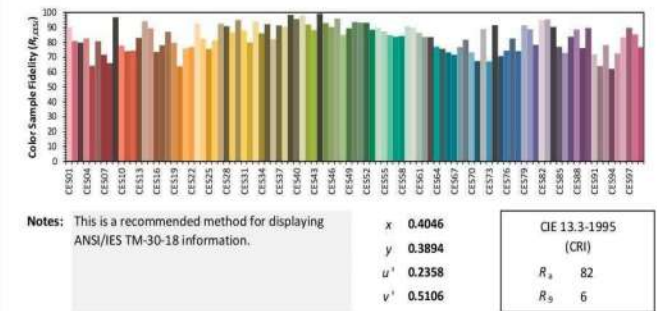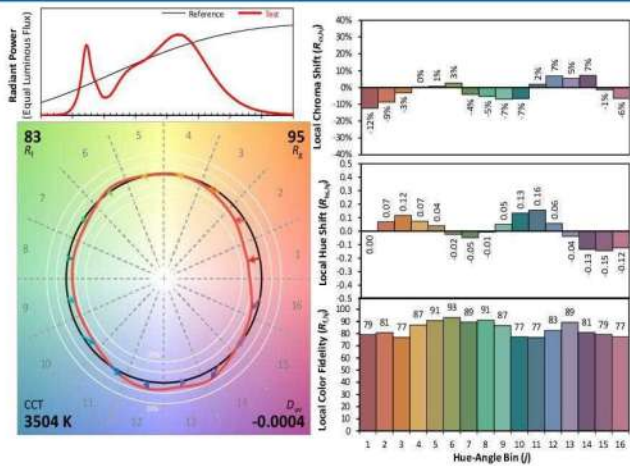

### SPECTRUM

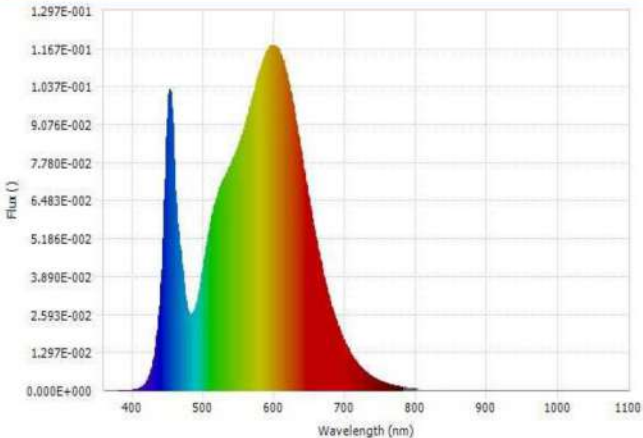

### POLAR CANDELA DISTRIBUTION

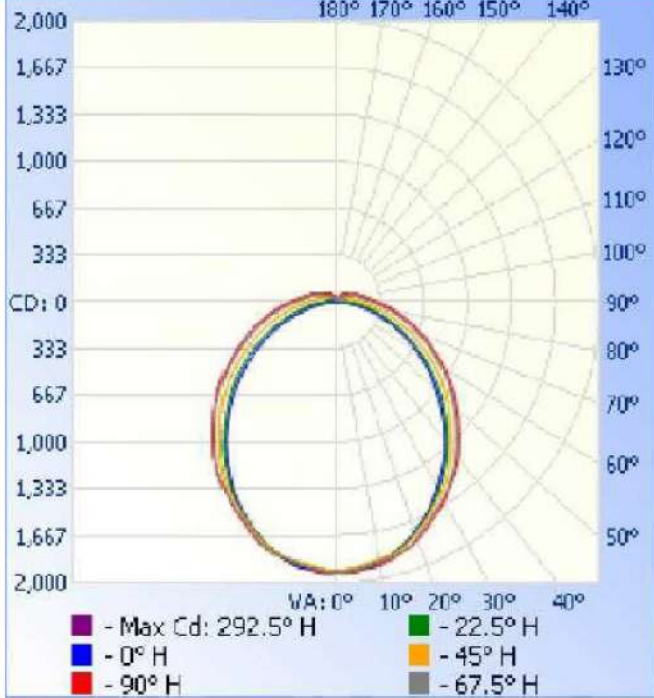

### ISOCANDELA PLOT

