

## 1x4 LED PANEL LIGHT

### PRODUCT DESCRIPTION

The Elakeview LED Panel light provides high lumen efficacy and energy savings to projects in low ceiling applications. This panel light is an excellent energy efficient replacement for fluorescent fixture.



### HIGHLIGHTS

- AC120-347V
- Color Temperature Selectable:  
3500K/4000K/5000K
- Wattage Selectable:  
25W/30W/40W
- Efficacy: 112 LM/W
- CRI>80
- 0-10V continuous dimming
- Receptacle for Bluetooth sensor
- L70-50,000 hours
- Ultra-thin, Seamless Aluminum Frame
- PMMA Non-Yellowing Frosted Lens
- DLC 5.1 Premium, cUL Listed
- 7 Years Warranty. Extended Warranty Available



### APPLICATIONS

Designed for use in offices, schools, health care spaces, retail stores and more.

### ORDERING INFORMATION

CRI	INPUT VOLTAGE	POWER	EFFICACY	DELIVERED LUMENS	CCT	FINISH	SIZE
>80	AC120-347V	25/30/40W	114LM/W	2750/3300/4400LM	3500/4000/5000K	WHITE	2x2FT
>80	AC120-347V	25/30/40W	114LM/W	3125/3750/5000LM	3500/4000/5000K	WHITE	2x2FT
>80	AC120-347V	25/30/40W	112LM/W	2750/3300/4400LM	3500/4000/5000K	WHITE	1x4FT
>80	AC120-347V	25/30/40W	112LM/W	3125/3750/5000LM	3500/4000/5000K	WHITE	1x4FT
>80	AC120-347V	30/40/50W	115LM/W	3300/4400/5500LM	3500/4000/5000K	WHITE	2x4FT
>80	AC120-347V	30/40/50W	125LM/W	3750/5000/6250LM	3500/4000/5000K	WHITE	2x4FT

## 1x4 LED PANEL LIGHT

### PRODUCT FEATURE

- AC120-347V
- Wattage selectable: 30/40/50W
- Color temperature Selectable:  
3500/4000/5000K
- Efficacy - 115 LM/W
- CRI>80
- Operating temperature:-20 to 40°C
- 1-10V Dimmable, Flicker-Free Driver

- PMMA Non-Yellowing Frosted Lens
- Unique Heat Dissipation Design
- Seismic Clips Included
- High Shock and Vibration Resistance
- Embed/Suspension/Ceiling-mount
- L70 - 50000 hours



7 Years Warranty. Extended Warranty Available

### PRODUCT SPECIFICATIONS

LED TYPE	WATTS	EFFICACY	LUMENS	COLOR TEMP	BEAM ANGLE	CRI	VOLTAGE	POWER FREQ	POWER EFFICIENCY	POWER FACTOR	THD	OPERATING TEMP
SEOUL	25/30/40W	114LM/W	3125/3750/5000LM	3500/4000/5000K	120°	>80	AC120-347V	50/60HZ	86%-87%	>.95	<13.4%	-20 to 40°C

### DIMENSIONS


Length: 23.7" 60.2CM  
Width: 23.7" 60.2CM  
Depth: 1.2" 3.0CM

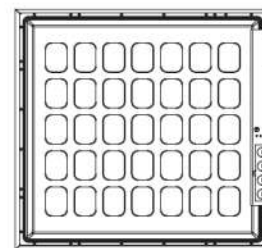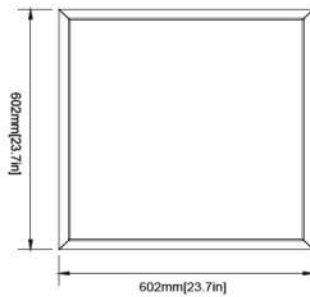

### MOUNTING OPTIONS



SUSPENSION KIT



SURFACE MOUNT KIT



RECESSED DRYWALL FRAME KIT

### OPTIONAL ACCESSORIES



347V QUICK CONNECTOR


REV 1

## 1x4 LED PANEL LIGHT


### PHOTOMETRIC INFORMATION

**Fixture Output: Rated Lumens/Lamp: 4400.0**  
**Zonal lumens in the 0-60° zone (%) 78.0** Input  
**Wattage: 40**  
**Beam Angle (°) 113.9**  
**Center Beam Candle Power (cd): 1792**


### ISOFOOTCANDLE PLOT

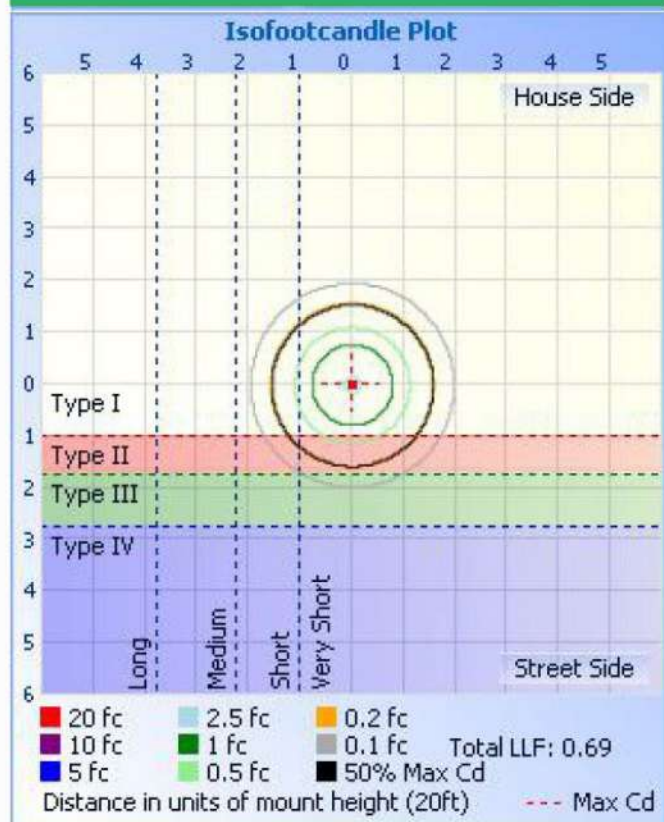


### ILLUMINANCE AT A DISTANCE

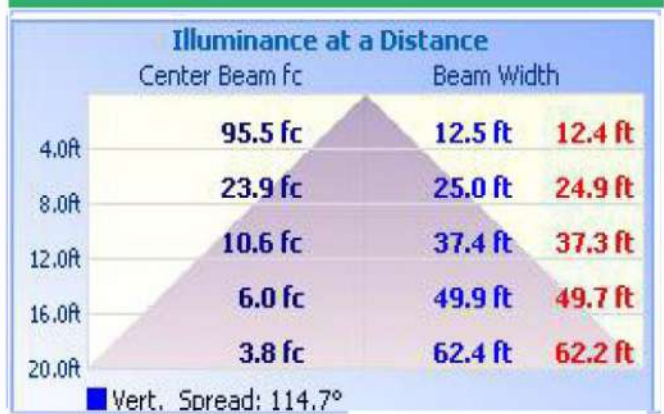

### POLAR CANDELA DISTRIBUTION

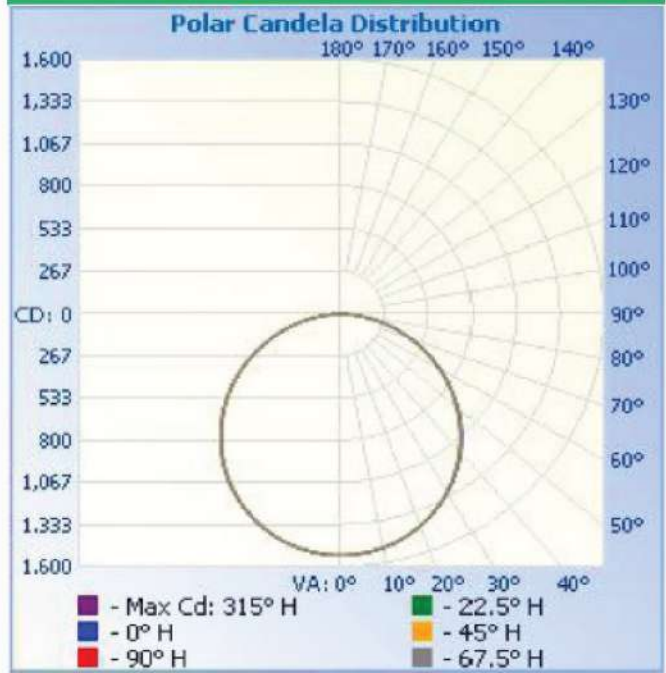

### ISOCANDELA PLOT

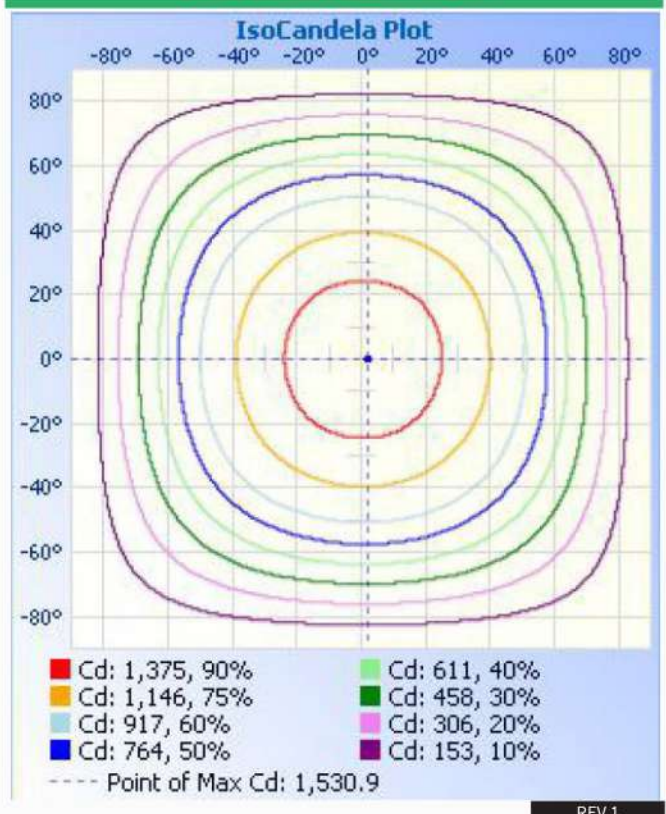

REV 1