

2x4 LED PANEL LIGHT

PRODUCT DESCRIPTION

The Elakeview LED Panel light provides sleek aluminum housing. It has universal power input from AC120-347V, field CCT/wattage selectable feature that satisfies all high quality interior light projects.

HIGHLIGHTS

- AC120-347V
- Color Temperature Selectable: 3500/4000/5000K
- Wattage Selectable: 30/40/50W
- Efficacy: 115 LM/W
- CRI>80
- 0-10V continuous dimming
- Ultra-thin, Seamless Aluminum Frame
- PMMA Non-Yellowing Frosted Lens
- Embed/Suspension/Ceiling-mount
- DLC 5.1 Premium, cUL Listed
- L70-50,000 hours
- 7 Years Warranty. Extended Warranty Available



APPLICATIONS

Designed for use in offices, schools, health care spaces, retail stores and more.

ORDERING INFORMATION							
CRI	INPUT VOLTAGE	POWER	EFFICACY	DELIVERED LUMENS	CCT	FINISH	SIZE
82	AC120-347V	25/30/40W	114LM/W	2750/3300/4400LM	3500/4000/5000K	WHITE	2x2FT
82	AC120-347V	25/30/40W	114LM/W	3125/3750/5000LM	3500/4000/5000K	WHITE	2x2FT
82	AC120-347V	25/30/40W	112LM/W	2750/3300/4400LM	3500/4000/5000K	WHITE	1x4FT
83	AC120-347V	25/30/40W	112LM/W	3125/3750/5000LM	3500/4000/5000K	WHITE	1x4FT
82	AC120-347V	30/40/50W	115LM/W	3300/4400/5500LM	3500/4000/5000K	WHITE	2x4FT
83	AC120-347V	30/40/50W	125LM/W	3750/5000/6250LM	3500/4000/5000K	WHITE	2x4FT

2x4 LED PANEL LIGHT

PRODUCT FEATURE

- AC120-347V
- Wattage selectable: 30/40/50W
- Color temperature Selectable: 3500/4000/5000K
- Efficacy - 125 LM/W
- CRI>80
- Operating temperature: -20 to 40°C
- 0-10V Dimmable, Flicker-Free Driver
- PMMA Non-Yellowing Frosted Lens
- Unique Heat Dissipation Design
- Seismic Clips Included
- Ultra-thin, Seamless Aluminum Frame
- High Shock and Vibration Resistance
- Embed/Suspension/Ceiling-mount
- L70-50000 hours
- DLC 5.1 Premium, cUL Listed



7 Years Warranty. Extended Warranty Available

PRODUCT SPECIFICATIONS


LED TYPE	WATTS	EFFICACY	LUMENS	COLOR TEMP	BEAM ANGLE	CRI	VOLTAGE	POWER FREQ	POWER EFFICIENCY	POWER FACTOR	THD	OPERATING TEMP
SEOUL	25/30/40W	114LM/W	3750/5000/6250LM	3500/4000/5000K	120°	82	AC120-347V	50/60HZ	86%-87%	>.95	<13.4%	-20 to 40°C

DIMENSIONS

Length: 47.6" 120.9CM
 Width: 23.7" 60.2CM
 Depth: 1.2" 3.0CM

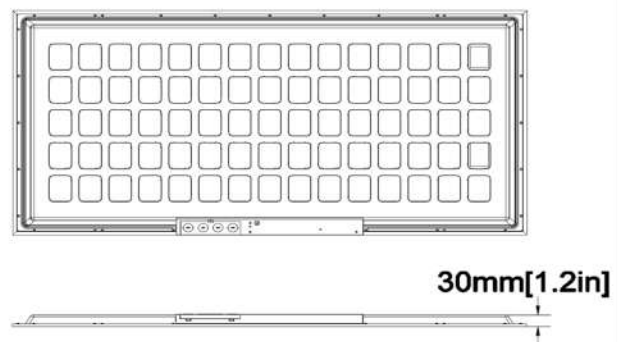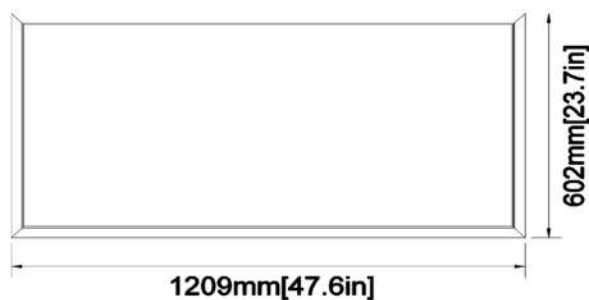

MOUNTING OPTIONS

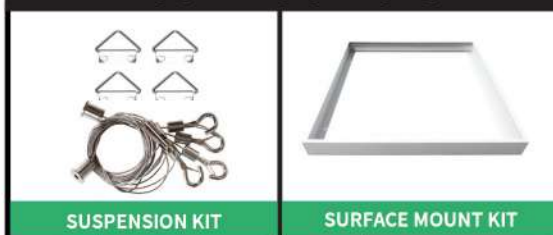

SUSPENSION KIT

SURFACE MOUNT KIT

OPTIONAL ACCESSORIES




347V QUICK CONNECTOR

2x4 LED PANEL LIGHT


PHOTOMETRIC INFORMATION

Fixture Output: Rated Lumens/Lamp: 5235.3
Zonal lumens in the 0-60° zone (%): 78.0 Input
Wattage: 40
Beam Angle (°): 113.9
Center Beam Candle Power (cd): 1792


ISOFOOTCANDLE PLOT

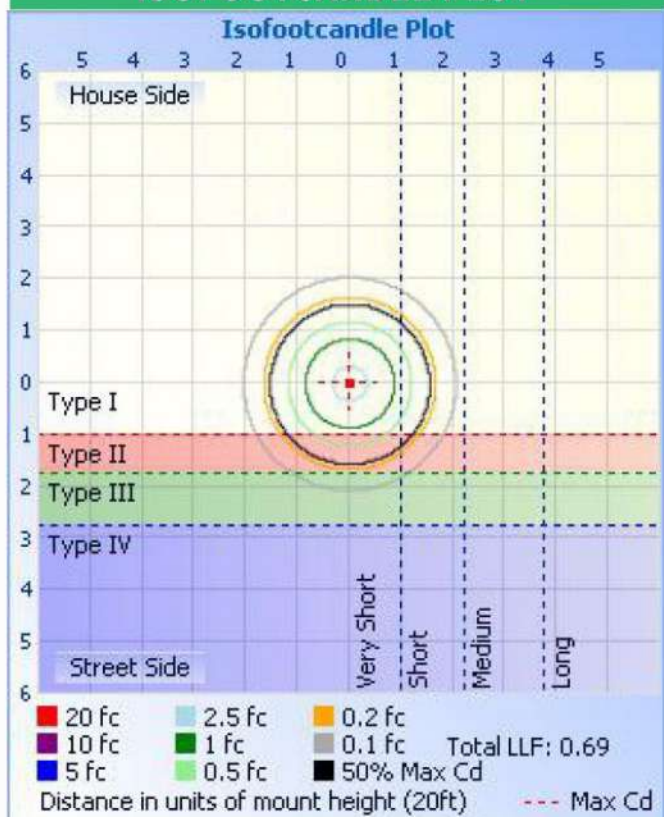


ILLUMINANCE AT A DISTANCE

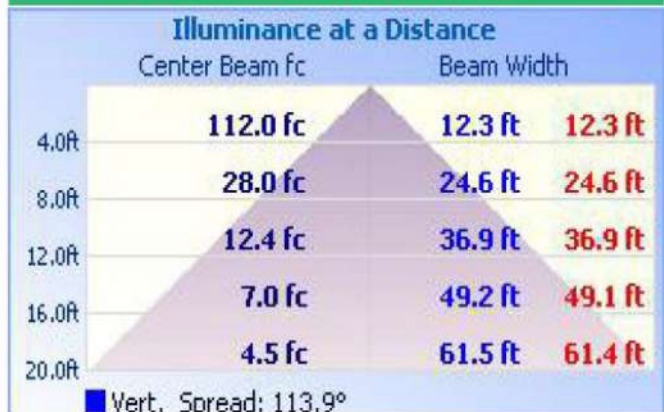

POLAR CANDELA DISTRIBUTION

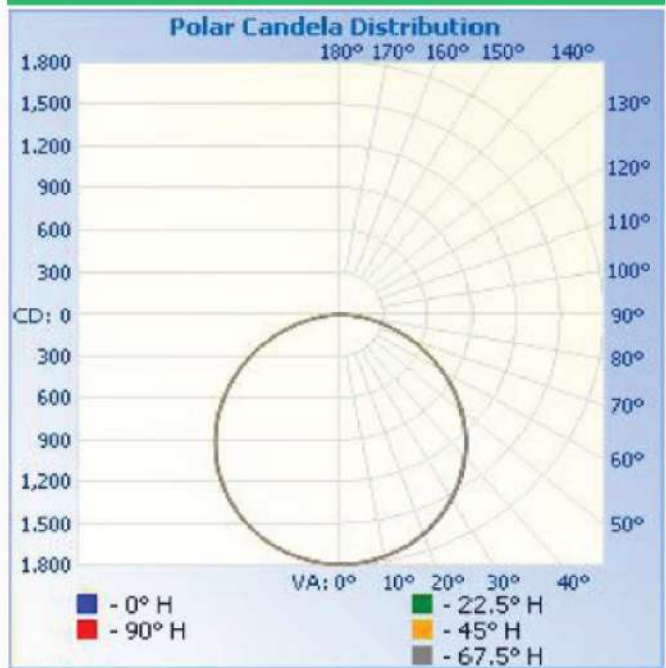

ISOCANDELA PLOT

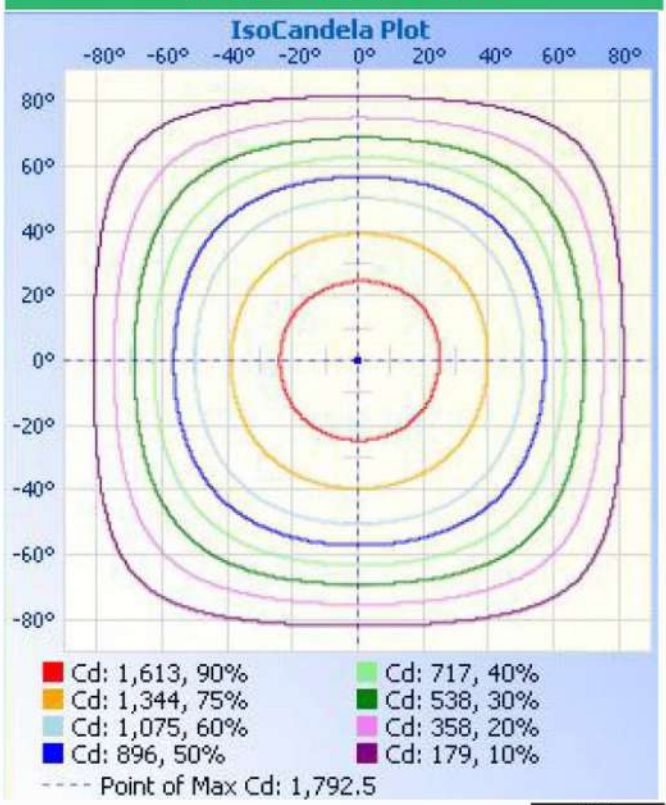

REV 1