

LED Security Wall Pack 17W AC110-277V 5000K



Product description: LED Security Wall Pack 17W AC110-277V 5000K

◇ Features



- Energy savings up to 70% vs 120W incandescent
- Sealed die-casting profile for outdoor applications
- High quality of heat-resisting polycarbonate optical lens
- Built-in UL class 2 driver, photocell optional



◇ Specifications

Rated Voltage (V)	120-277V
Rated Wattage (W)	17W
Frequency (Hz)	50/60 Hz
Rated Input Current (mA)	142mA Max
Power Factor	>0.82
Luminous Flux (LM)	1,700LM
Color Temperature	Day Light 5000K
Color Rendering Index (Ra)	>82
Beam Angle	80D
Lamp Efficacy (LM/W)	100LM/W
Rated Lamp Lifetime (h)	50,000
Dimming	N
Dimension (mm)	220*138*85
IP Rating	65
Operating Temperature	-40 to 55 degC
Housing Material	Aluminum
Certificate	UL, CUL, DLC, Rohs

Angle: 78.30°. Flux out: 827.2 lm.

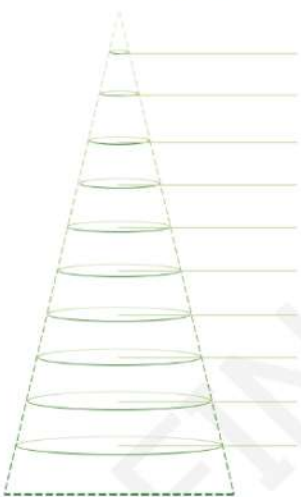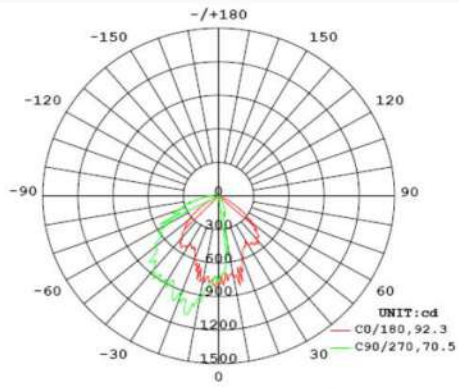

Height (m)	Diameter (cm)	E _{avg} (lx)	E _{max} (lx)
0.5	81.4	1496.0	4012.0
1.0	162.8	374.0	1003.0
1.5	244.2	166.2	445.8
2.0	325.7	93.5	250.8
2.5	407.1	59.8	160.5
3.0	488.5	41.6	111.5
3.5	569.9	30.5	81.9
4.0	651.3	23.4	62.7
4.5	732.7	18.5	49.5
5.0	814.1	15.0	40.1

	C0/180	C45/225	C90/270	C135/315	AVG.
Beam Angle (50% I _{max}):	92.3	74.7	70.5	75.7	78.3
Field Angle (10% I _{max}):	125.3	114.8	110.4	115.9	116.6