

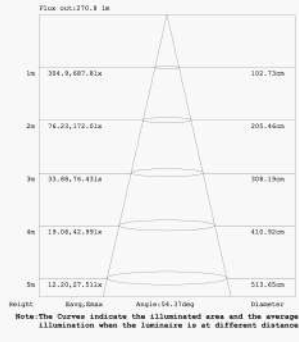
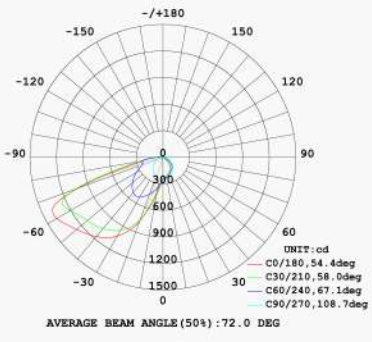


LED Wall Pack



Photometric

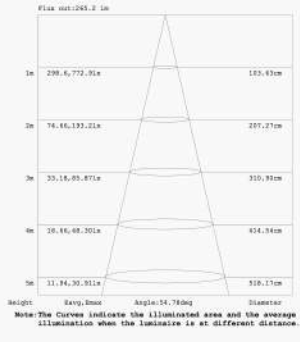



15W

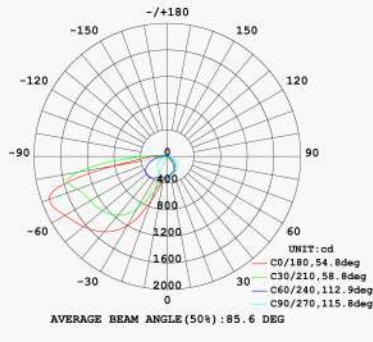

20W

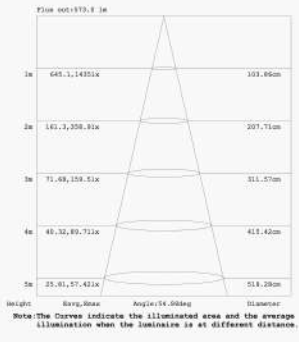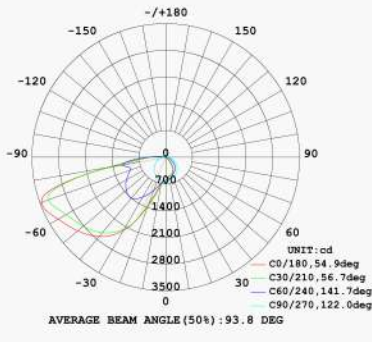

40W

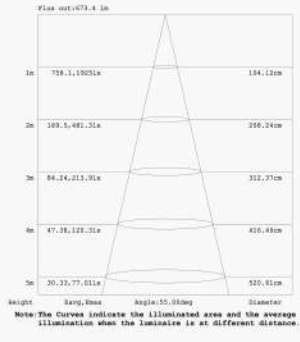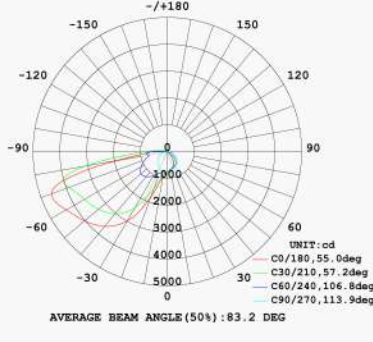

60W

LED Wall Pack



Features



- Adjustable Power and CCT
- 0-10V dimming system with dim-to-off voltage threshold (0.1V to 0.5V)
- Surge Protected
- Flicker free ($\leq 10\%$)
- IP65 wet location rating

Specifications

Input	AC 120-347V 50-60Hz
CRI	>70
Power Factor	>0.9
Operating Temperature	-40-45°C (-40-113°F)
Operating Location	Wet (IP65)
Materials	Die-casting Aluminum+PC lens
Finish	Brown
Certification	cULus, DLC
Warranty	5 Years



Dimensions Size unit: mm/inch

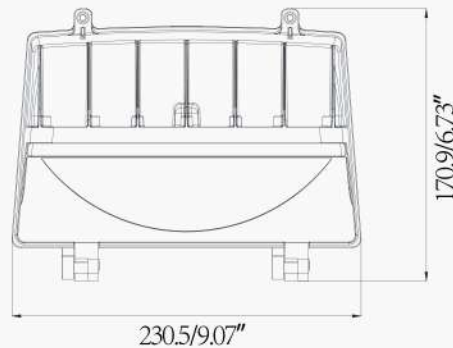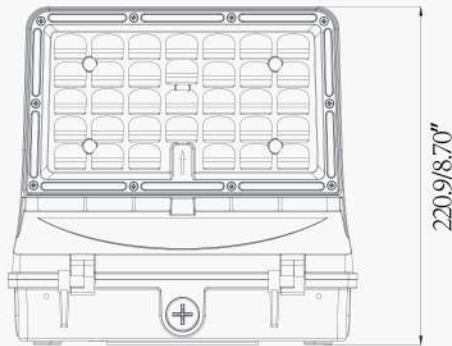

Specification Guide

Watt	Lumen	Efficacy(LM/W)	CCT (K)	Dimming
15/20/40/60	1875/2500/5000/7500	125	3000/4000/5000	0-10V Dimming