

LED Wall Pack



Features



- Adjustable Power and CCT
- 0-10V dmming system with dim-to-off voltage threshold (0.1V to 0.5V)
- Surge Protected
- Flicker free ($\leq 10\%$)
- IP65 wet location rating

Specifications

Input	AC 120-347V 50-60Hz
CRI	>80
Power Factor	>0.9
Operating Temperature	-40-45°C (-40-113°F)
Operating Location	Wet (IP65)
Materials	Die-casting Aluminum+PC lens
Finish	Grey
Certification	cULus, DLC
Warranty	5 Years



Dimensions Size unit: mm/inch

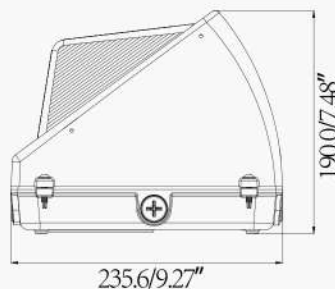
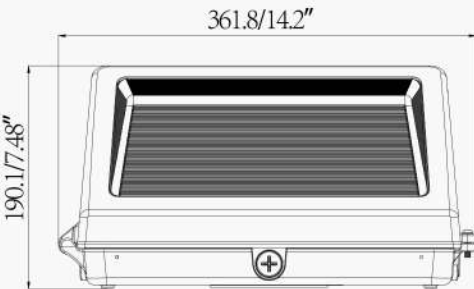


Specification Guide



Watt	Lumen	Efficacy(LM/W)	CCT (K)	Dimming
80/100/120	11600/14500/17400	145	3000/4000/5000	0-10V Dimming

LED Wall Pack



Photometric

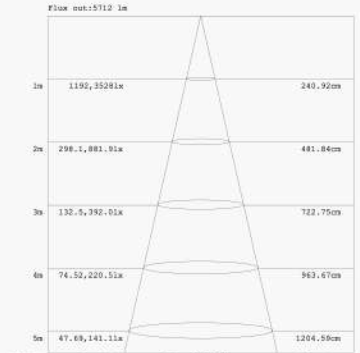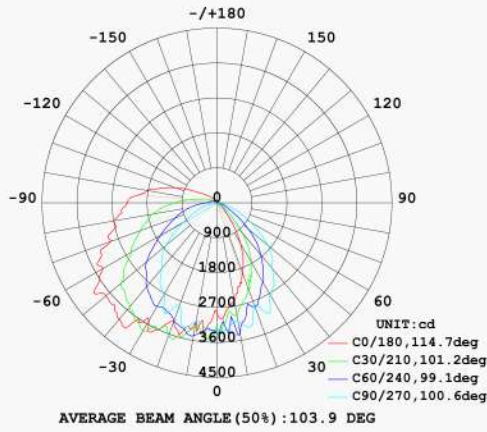

Note: The Curves Indicate the illuminated area and the average illumination when the luminaire is at different distance.

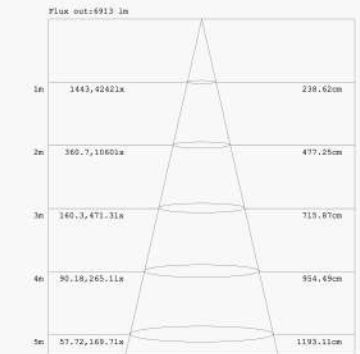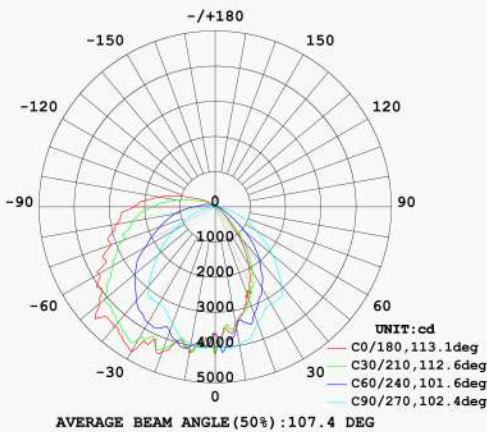

Note: The Curves Indicate the illuminated area and the average illumination when the luminaire is at different distance.

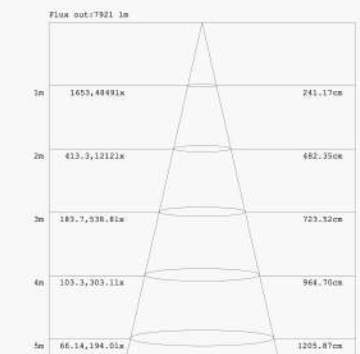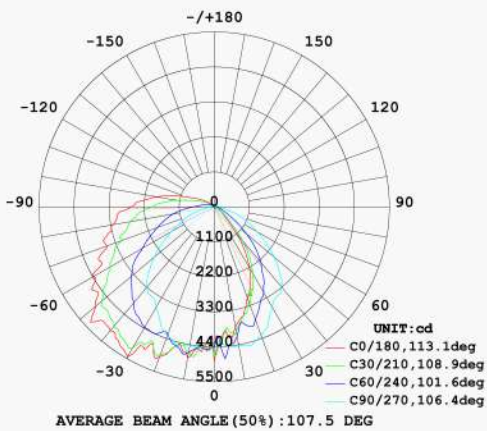

Note: The Curves Indicate the illuminated area and the average illumination when the luminaire is at different distance.