


LED Strip Light




Features

- Adjustable Power and CCT
- 0-10V dimming system with dim-to-off voltage threshold (0.1V to 0.5V)
- Flicker free ($\leq 10\%$)
- Motion sensor, photocell, and Emergency backup battery available
- Surface mounting ready; Suspended mounting kit available
- Row connector available
- Long lifespan L70>100,000 hours*

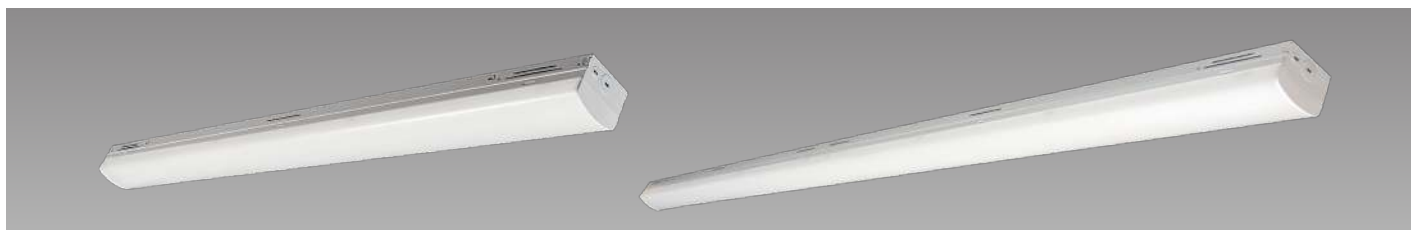

Dimensions

Size unit: mm/inch

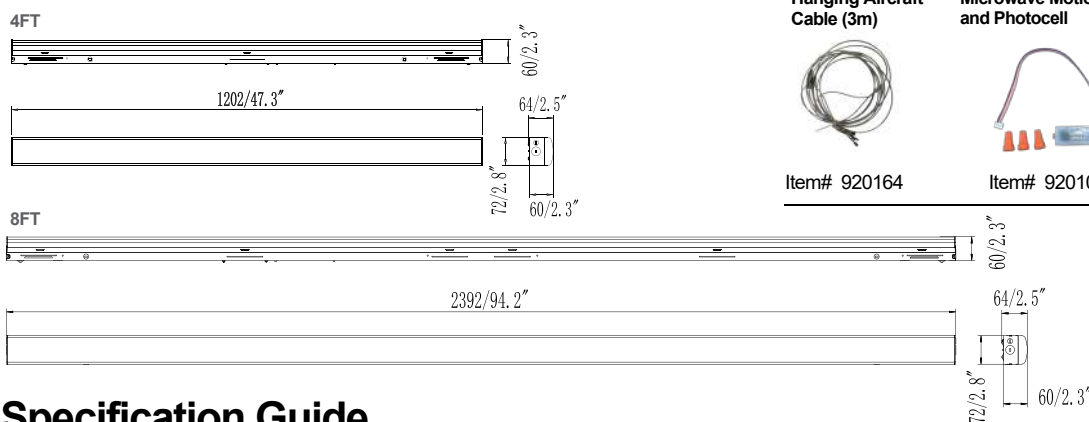

Specification Guide

Order Qty	Item ID	Model #	Size	Wattage (W)	Lumens (LM)	Efficacy (LM/W)	Colour Temperature (K)	Dimming	Features	Master Case Qty
	1120104	MRLSP201043C3DZ40WH	4 ft	25/30/40	3250/3900/5200	130	3500/4000/5000	0-10V Dimming		6
	1120109	MRLSP201043C3DZE40WH	4 ft	25/30/40	3250/3900/5200	130	3500/4000/5000	0-10V Dimming	Emergency Battery	6
	1120105	MRLSP201043C3DZ45WH	4 ft	34/38/45	4420/4940/5850	130	3500/4000/5000	0-10V Dimming		6
	1120108	MRLSP201083C3DZ90WH	8 ft	65/75/90	8450/9750/11700	130	3500/4000/5000	0-10V Dimming		4

*Based on IES LM-80 results and TM-21 calculations. **DLC 5.1P only applies to certain model(s).

Specifications

Input	AC 120-347V 50-60Hz
CRI	>80
Power Factor	>0.9
Operating Temperature	-20-50°C (-4-122°F)
Operating Location	Damp
Materials	Housing: Sheet metal stamping; Lens: PMMA Frosted Polystyrene
Finish	White
Certification	cULus, DLC 5.1S, DLC 5.1P**
Warranty	5 Years

Accessories

Purchase Separately

Hanging Aircraft Cable (3m)



Item# 920164

Microwave Motion Sensor and Photocell



Item# 920102

Row Connector





Item# 920161

LED Strip Light

Photometric

1120104 4ft 40W

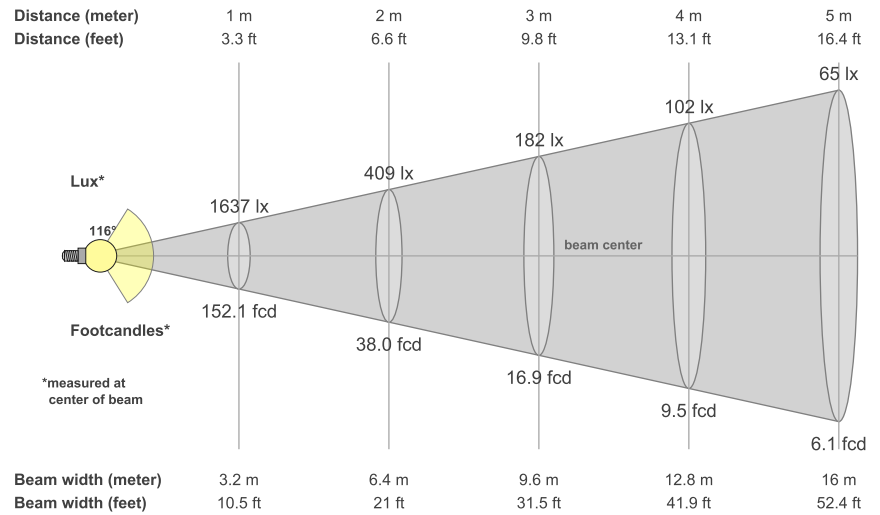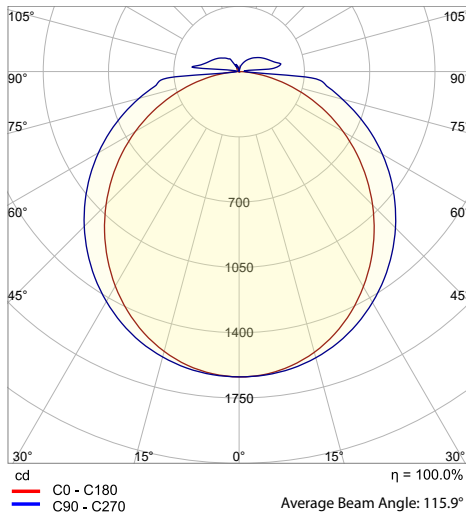

1120105 4ft 45W

